
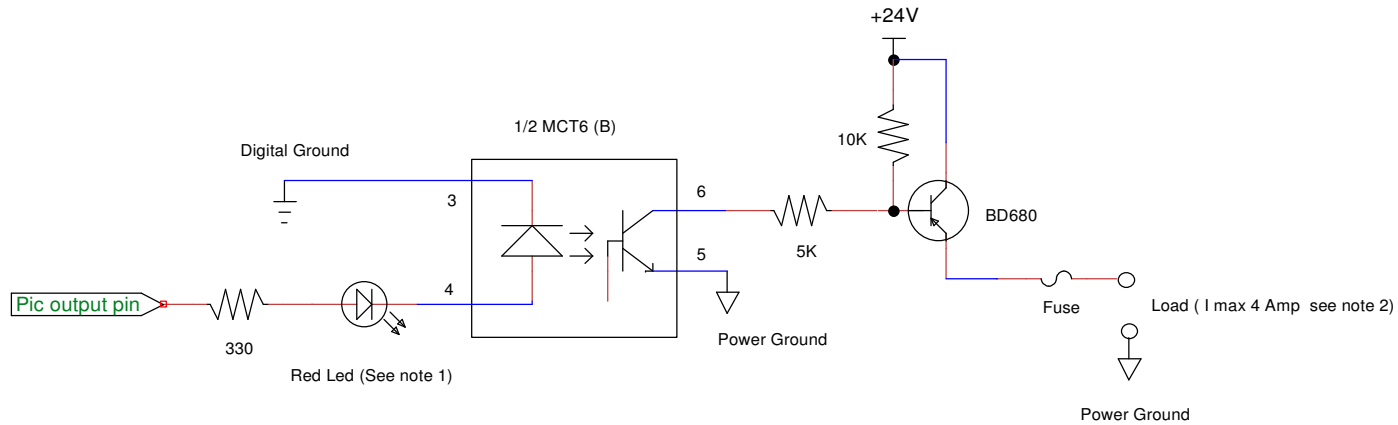


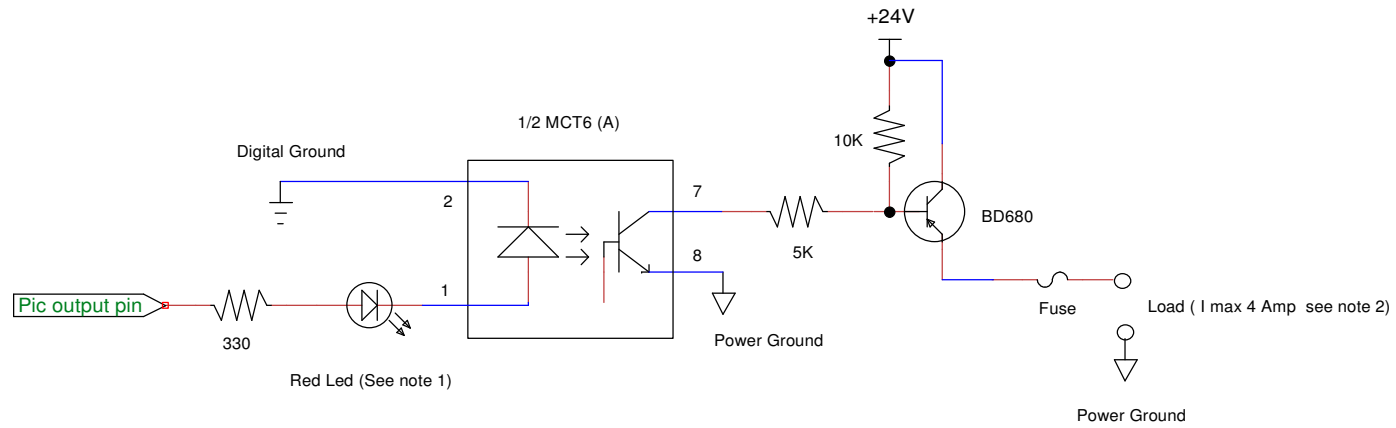

Note 1 : Leds are optional (Useful to monitor pin state)

Note 2 : 4 Amp is the max current with proper thermal dissipation.

Grounds separation increase transient immunity

Title Optoisolate Output		
Author A.Ratti		
File nti\TinyCAD Examples\Optoisolate_Outputs.dsn	Document	
Revision 1.0	Date 01-01-2005	Sheets 1 of 1