








2 x AAA
BATTERIES



USE TC-WIRE LINKS IN D2, D3 & D4 POSITIONS



BACKLIGHT

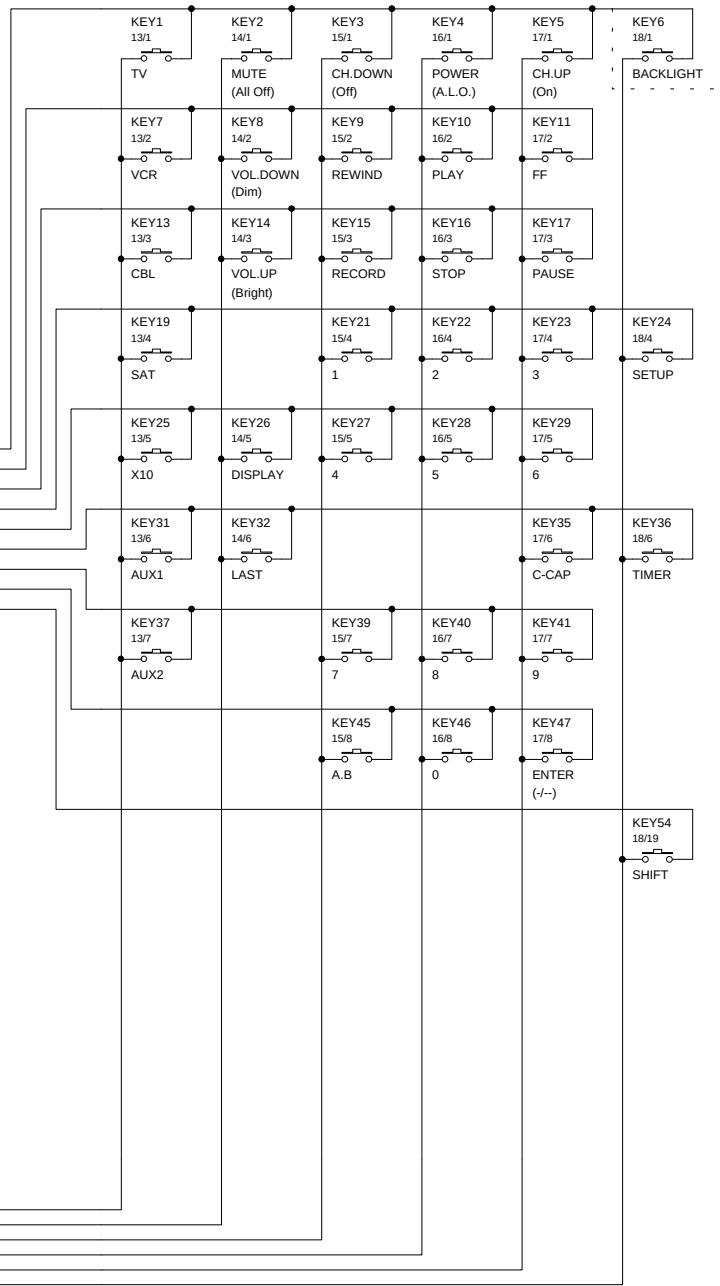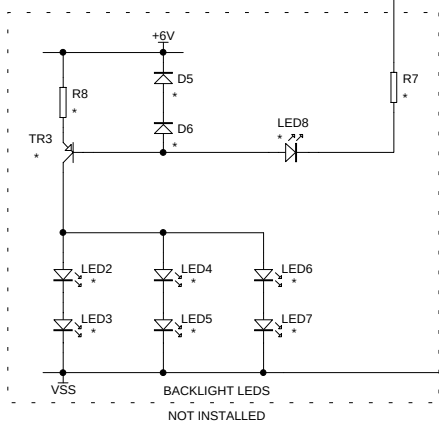

- NOTES:-
- 1/ ALL UNSPECIFIED DIODES 1N4148 OR EQUIVALENT.
 - 2/ ALL UNSPECIFIED DAUGHTER BOARD CAPACITORS ARE SMD TYPE.
 - 3/ ALL UNSPECIFIED DAUGHTER BOARD RESISTORS ARE SMD TYPE.
 - 4/ ALL UNSPECIFIED RESISTORS ARE 0.125W 5%.
 - 5/ ALL UNSPECIFIED CAPACITORS ARE AXIAL MLC TYPE.
 - 6/ LABELLING OF X10 KEY DEPENDANT UPON CUSTOMER.

"*" DENOTES COMPONENT NOT INSTALLED

DO NOT SCALE DRAWING		TITLE:		
DRN	BKW	DATE	2/3/00	
APPD.	DATE	FIRST DRAWN	2/3/00	PRINT DATE
FILE	D:\DATA\SCHIR8UR19AA.SCH	REVISION DATE	2/3/00	SHEET No. 1 of 1
PICO ELECTRONICS Ltd., Eastfield Industrial Estate, Glenrothes, Fife, KY7 4NZ, SCOTLAND		REV. A		